



The Next Generation of OUTDOOR DIGITAL SIGNAGE



Features:

- High-Brightness LCD Panel
- All Weather Proof IP65 Enclosures
- Operating Temperature -40C To 50C*
- Integrated heater and air conditioner
- Slim Bezel Thickness 18mm only
- 102" Video wall [46" TFT-LCD (4x1)]
- Vandal Resistant Screen & housing
- Unique Front Access Design
- Remote Reboot/Temp.& Humidity Monitoring available
- Wireless and VGA/DVI CAT5 signal extenders available

- **Excellent Sunlight Readable Outdoor LCD**
- **Environmentally sealed with Thermal Control**
- **Unique Front Access Design**

SunTronic's GS product line, featuring innovative All-Weather Sunlight Readable LCD technology, provides the highest-quality Sunlight Readable image available in Outdoor Environment. These Rugged Industrial Grade Outdoor displays have the exemplary brightness and resolution you've come to expect from SunTronics. GS technology delivers stunning images for use in applications such as:


- Digital Signage
- Retail/ Restaurants
- Gas Stations
- Restaurants
- Ski Resorts
- Golf Course
- Shopping Malls
- Outdoor Signs

SunTronic's GS line is available in four sizes: 32", 46", 57" and 70". Only SunTronic's GS monitors deliver the full HD resolution for outdoor stunning Digital Contents.

SunTronic's technology has the unprecedented slimmest front bezel for outdoor Video Wall. In addition, Front access feature for easy maintenance allows user to gain front access to valuable components, such as air conditioner, heater and LCD controller board inside the sealed enclosures, eliminating the need to remove from the wall.



Part Number	GS3200L/P	GS4600L/P	GS5700L/P	GS7000L/P
Resolution	1366 x 768	1366 x 768	1920 x 1080	1920 x 1080
Brightness	1250 nits	1500 nits	1200 nits	2000 nits
Screen Diagonal	32 in	46 in	57 in	70 in
Contrast Ratios	1500:1	3000:1	1500:1	2500:1
Colors	16.7M (8bit)	16.7M (8bit)	16.7M (8bit)	16.7M (8bit)
Response Time	8 ms	8 ms	8 ms	8 ms
Viewing Angle	85/85/85/85	89/89/89/89	89/89/89/89	89/89/89/89
Interface	VGA, HDMI, S-Video and Composite Video			
Operating Temperature	-40°C to 50°C°	-40°C to 50°C°	-40°C to 50°C°	-40°C to 50°C°

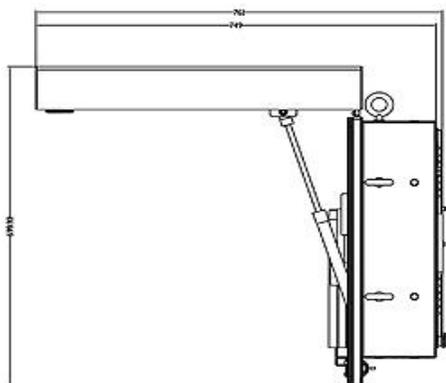

How does the EasyAccess work?

The Unique SunTronic's Front EasyAccess design allows the user to gain front access to valuable components , such as air conditioner, heater and LCD controller board inside the sealed enclosures, eliminating the need to remove from the wall for maintenance.

Distributed by:
i-Tech Company
1-888-483-2418
www.i-techcompany.com



*Suntronic LCD reserves the right to change any specifications without any notice.